




## ▶ PD100/MD100 *Movement/Presence Sensor*

Surface mounting and flush mounting option  
2-point fixed-light control  
Independent HVAC duct  
Master / Slave Fully / Semi-automatic operation modes  
Motion detection at 2.5 m mounting height, 9 m diameter


Constant  
Light Control

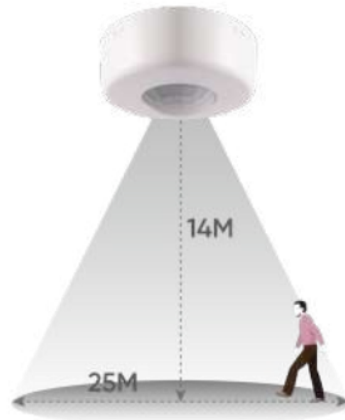

## ▶ HD100 *High Bay Sensor*

Constant light control  
Fully / Semi automatic lighting control  
Independent HVAC duct  
Lighting can be set to different  
brightness levels

25m x 14m  
Coverage Area

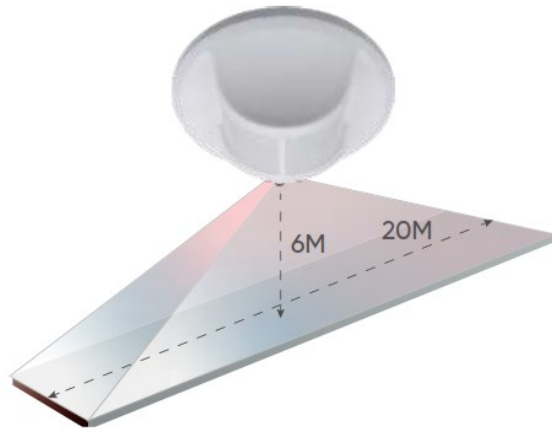

## ▶ CD100 *Corridor Sensor*

Different levels of brightness can be arranged for the states of: "Movement", "After Movement", and "No Movement". It can operate in parallel connection with other sensors either on standalone or master-slave basis depending on application requirements



CD100 20x6m  
CD High Bay 22x12m  
Coverage Area